

## 4000-40MQ3 oil free compressor with dryer



### Features

- 100% oil free
- 100% duty cycle
- low noise and vibration level
- easy maintenance
- long-life, 2-year warranty
- 8000 hours piston life at 8bar
- 4000 hours maintenance interval for the dryer

### Description

- built-in 2-column adsorption dryer
- pressure dew point down to -40°C
- 1µm air filtration (class 2 for dust according to ISO8573.1:2001)
- pressure regulator included
- receiver with internal coating and 5-year warranty


### OTHER VERSIONS

- without dryer (4000-40M)


### Product specifications

Model	2000-40MQ2		
Voltage	V	1x230	1x230
Frequency	Hz	50	60
Motor	HP	3	3
	kW	2.2	2.2
Displacement	l/min	352	424
Air flow @ 8bar	l/min	180	220
	cfm	6.36	7.77
Max. pressure	bar	8	8
	psi	120	120
Max. current	A	16	16.6
Receiver volume	litres	40	40
	gallon	10.6	10.6
Weight	kg	160	160
	lbs	353	353
Noise level	dB(A)/1m	55	55
Duty cycle		100%	100%

### Air flow / pressure curve

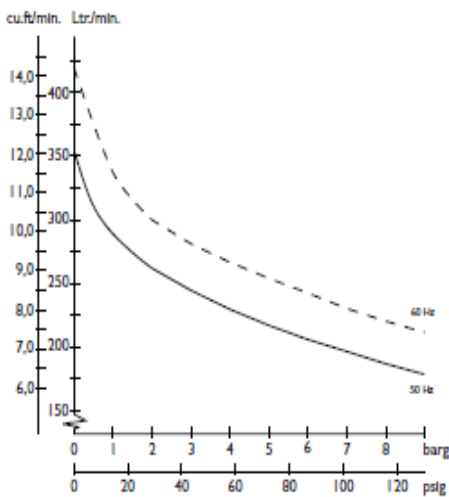

### Dimensions\*

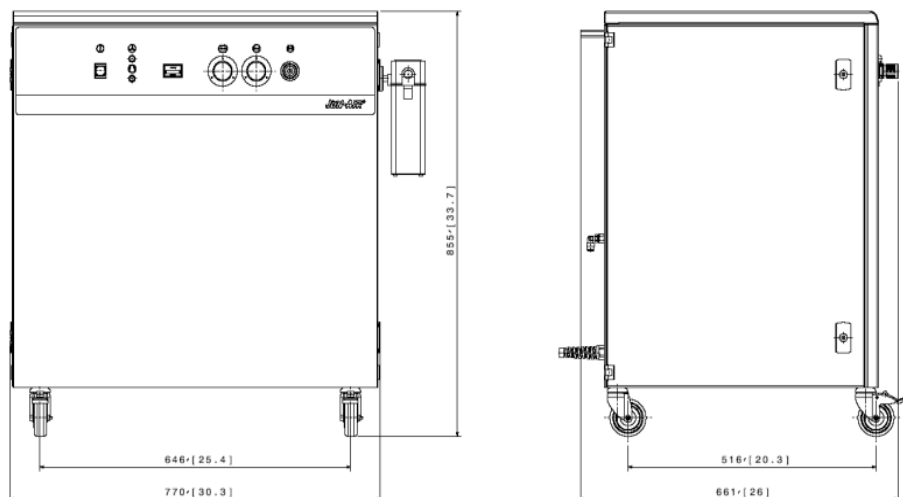

Indicated air flow is reduced by approx. 18-20% on units with dryer

\* for unit without accessories or options